


EOS

Minimalism. Style.
High visual comfort.

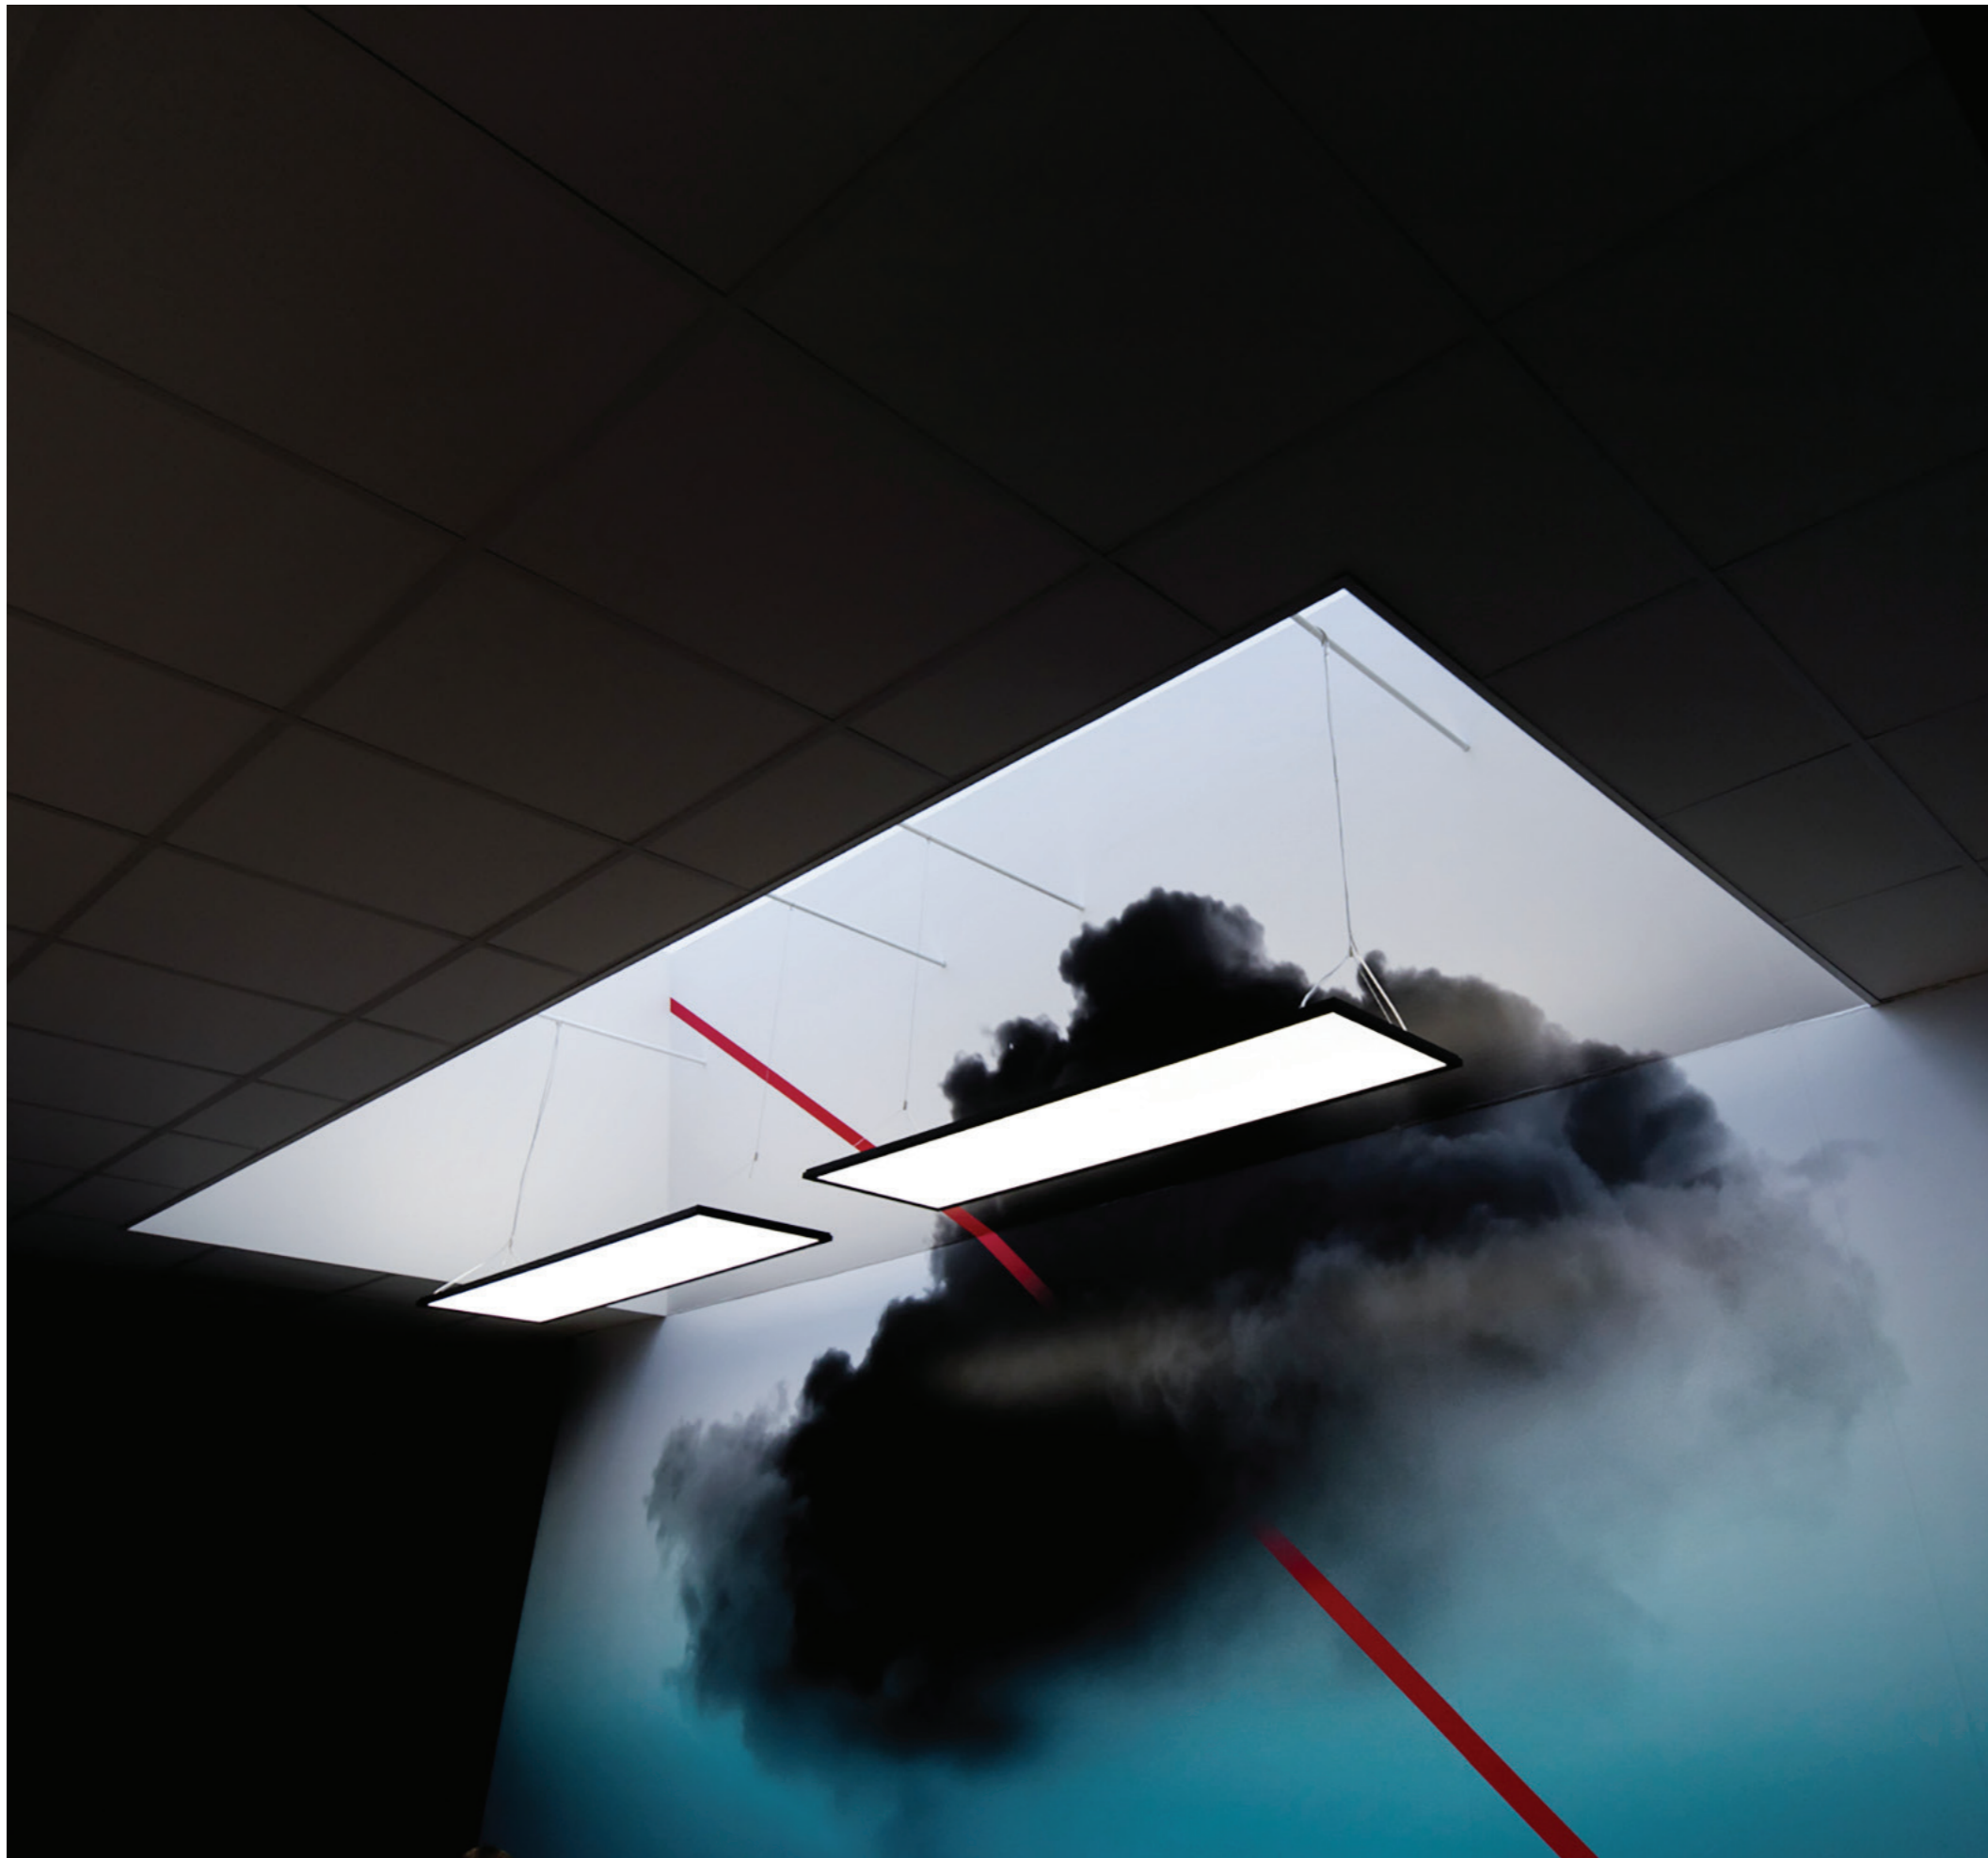

Minimalism.
Style.
High visual
comfort.

EOS

The luminaire that makes your office a place of comfort and gives a stylish touch to your interior. Emitting light both up to the ceiling and down to the workspace, it supplies homogenous glare-free light and a maximum level of visual comfort. It is the perfect fixture for conference rooms, open offices, lobbies, and other environments where you want to make an impact.

Characterized by a slim frame around a transparent panel, the EOS Sky does not impose on the architecture of the room, but adds elegance. When switched on, it creates the perception of a pleasant homogenous light floating in the air. Lighting intensity can be dimmed via the DALI.





85
lm/W

Features

- 2700 / 3000 / 4000K
- RA>80 / RA>90 (on request)
- McAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature
- Standard suspension kit: 1,5m
- Standard power cable: 2m

Options

NO DIM DALI

CE IP20 IK02

Slim design




PENDANT



size

1200x300 | 1200x450 | 1500x300 | 1500x450mm

dimensional sketch

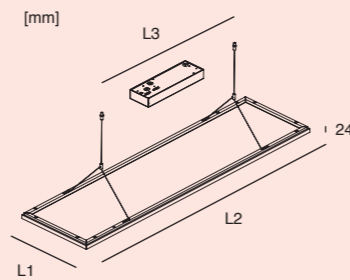


housing colour

● ● High-quality aluminium with powder coated finish in RAL9016 white fine texture | RAL9005 black fine texture

optics

Transparent high-quality PMMA prismatic sheet for better light distribution

light distribution

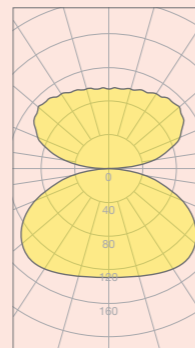

EOS Sky



Go to product configurator

Order code	Description	System power (W)	Direct light output (lm)	Indirect light output (lm)	Weight (kg)
EOS SKY					
EO12030SEY00X0	EOS SKY 1200x300	58	2634	2243	4,6
EO12030SEY01X0	EOS SKY 1200x300 DALI	59	2634	2243	4,6
EO12030SEY0CX0	EOS SKY 1200x300 CASAMBI	59	2634	2243	4,6
EO12040SEY00X0	EOS SKY 1200x450	58	2634	2243	5,6
EO12040SEY01X0	EOS SKY 1200x450 DALI	59	2634	2243	5,6
EO12040SEY0CX0	EOS SKY 1200x450 CASAMBI	59	2634	2243	5,6
EO15030SEY00X0	EOS SKY 1500x300	64	2912	2480	6,3
EO15030SEY01X0	EOS SKY 1500x300 DALI	65	2912	2480	6,3
EO15030SEY0CX0	EOS SKY 1500x300 CASAMBI	65	2912	2480	6,3
EO15040SEY00X0	EOS SKY 1500x450	64	2912	2480	7,4
EO15040SEY01X0	EOS SKY 1500x450 DALI	65	2912	2480	7,4
EO15040SEY0CX0	EOS SKY 1500x450 CASAMBI	65	2912	2480	7,4

L1	L2	L3
315	1155	600
465	1435	1200
LED color temperature		Code Y
2700K	Warm white	2
3000K	Warm white	3
4000K	Natural white	4
5000K	Cool white	5
Housing Color		Code X
White	RAL9016 fine texture	1
Black	RAL9005 fine texture	2



www.ledluks.com

Ledluks en Belgique

Secondway

Rue du Stordoir 67

5030 GEMBLOUX

&

Bredestraat 4

2000 ANTWERP

www.secondway.be